


AE 100.942.025.2 Accelerometer

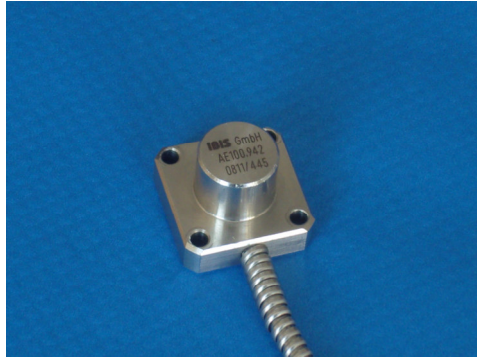


- accelerometer for vibration and roller bearing condition measurements
- heavy duty design for use in harsh environments, such as in contact with cooling liquid
- integral cable for protection against moisture
- PUR cable isolation
- stainless steel housing and armoured cable


Specifications:

Sensor type	piezoelectric accelerometer (PZT/Shear)
Sensitivity	100 mV/g +/-10%
Resolution	0,001 g
Acceleration Range	max.50 g
Shock Limit	max 5000 g
Frequency Range	0,5 - 10.000 Hz +/-3 dB (5.000 - 50.000 Hz for spike-energy-measurement)
Resonant Frequency, mounted	> 25 kHz
Power Requirements	Constant current 2 -10 mA; +18 to 28 V DC
Temperature Range	-40...+80°C
Housing Material	stainless steel 1.4305 / 1.4301
Dimensions	footprint 25x25 mm total height approx. 18 mm
Mounting Holes	for screw M3, distance: 19x19 mm
Weight	approx. 40 Gramms (excluding cable)
Shipping Weight	approx. 0.2 kg (with 2.5 m cable)
Cable	shielded 2 wire, PUR jacketed, stainless steel armour. cable diameter: approx. 2.8 mm, armour diameter: approx. 5 mm white: signal, brown or blue: ground, shield isolated from housing
Standard cable lengths / Order No.	approx 2,5 meters AE100.942.025.2 approx 8 meters AE100.942.025.2

Dimensions:

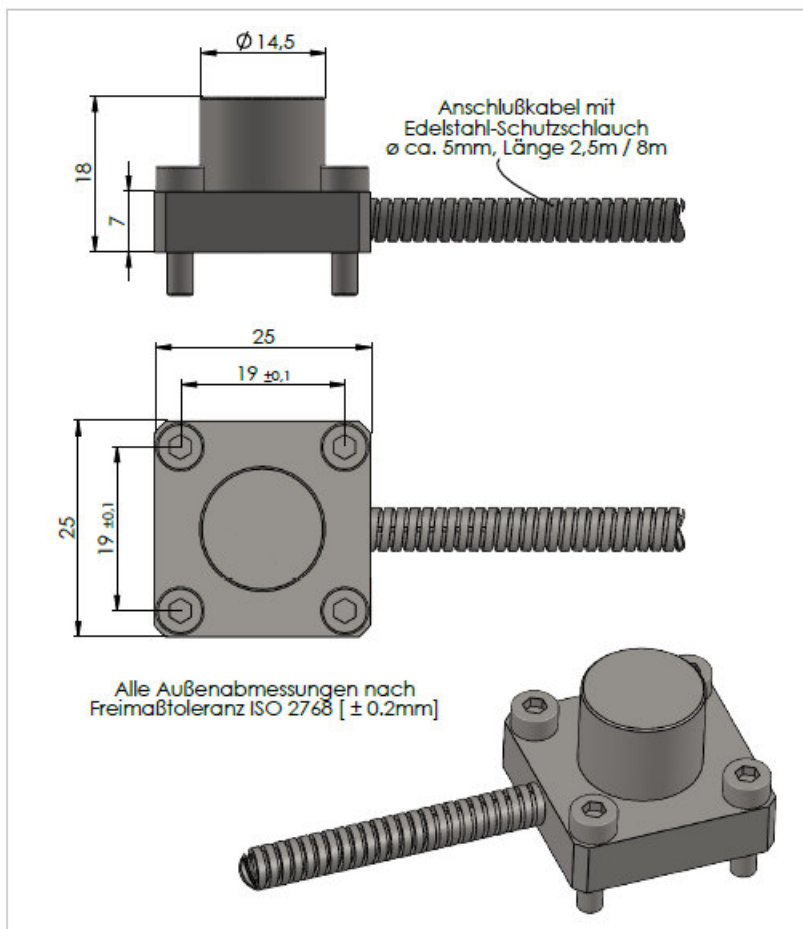

Frequenzgang (typisch)

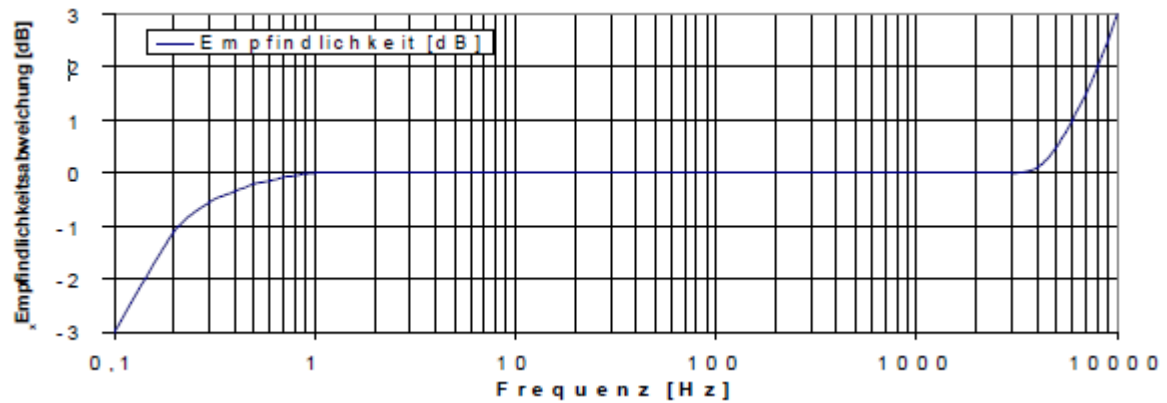

IBIS GmbH

Werner-von-Siemens-Str. 21
64319 Pfungstadt

Tel: (0)6157-949-370

Fax: (0)6157-949-100

www.ibis-gmbh.de

info@ibis-gmbh.de